


Falcon

Unique series of single and double chamber floor models with a stainless steel housing, an aluminium vacuum chamber and an aluminium lid with sight glass. Optimize efficiency and operational profit with these industrial, user friendly and low maintenance vacuum packaging machines.



Falcon

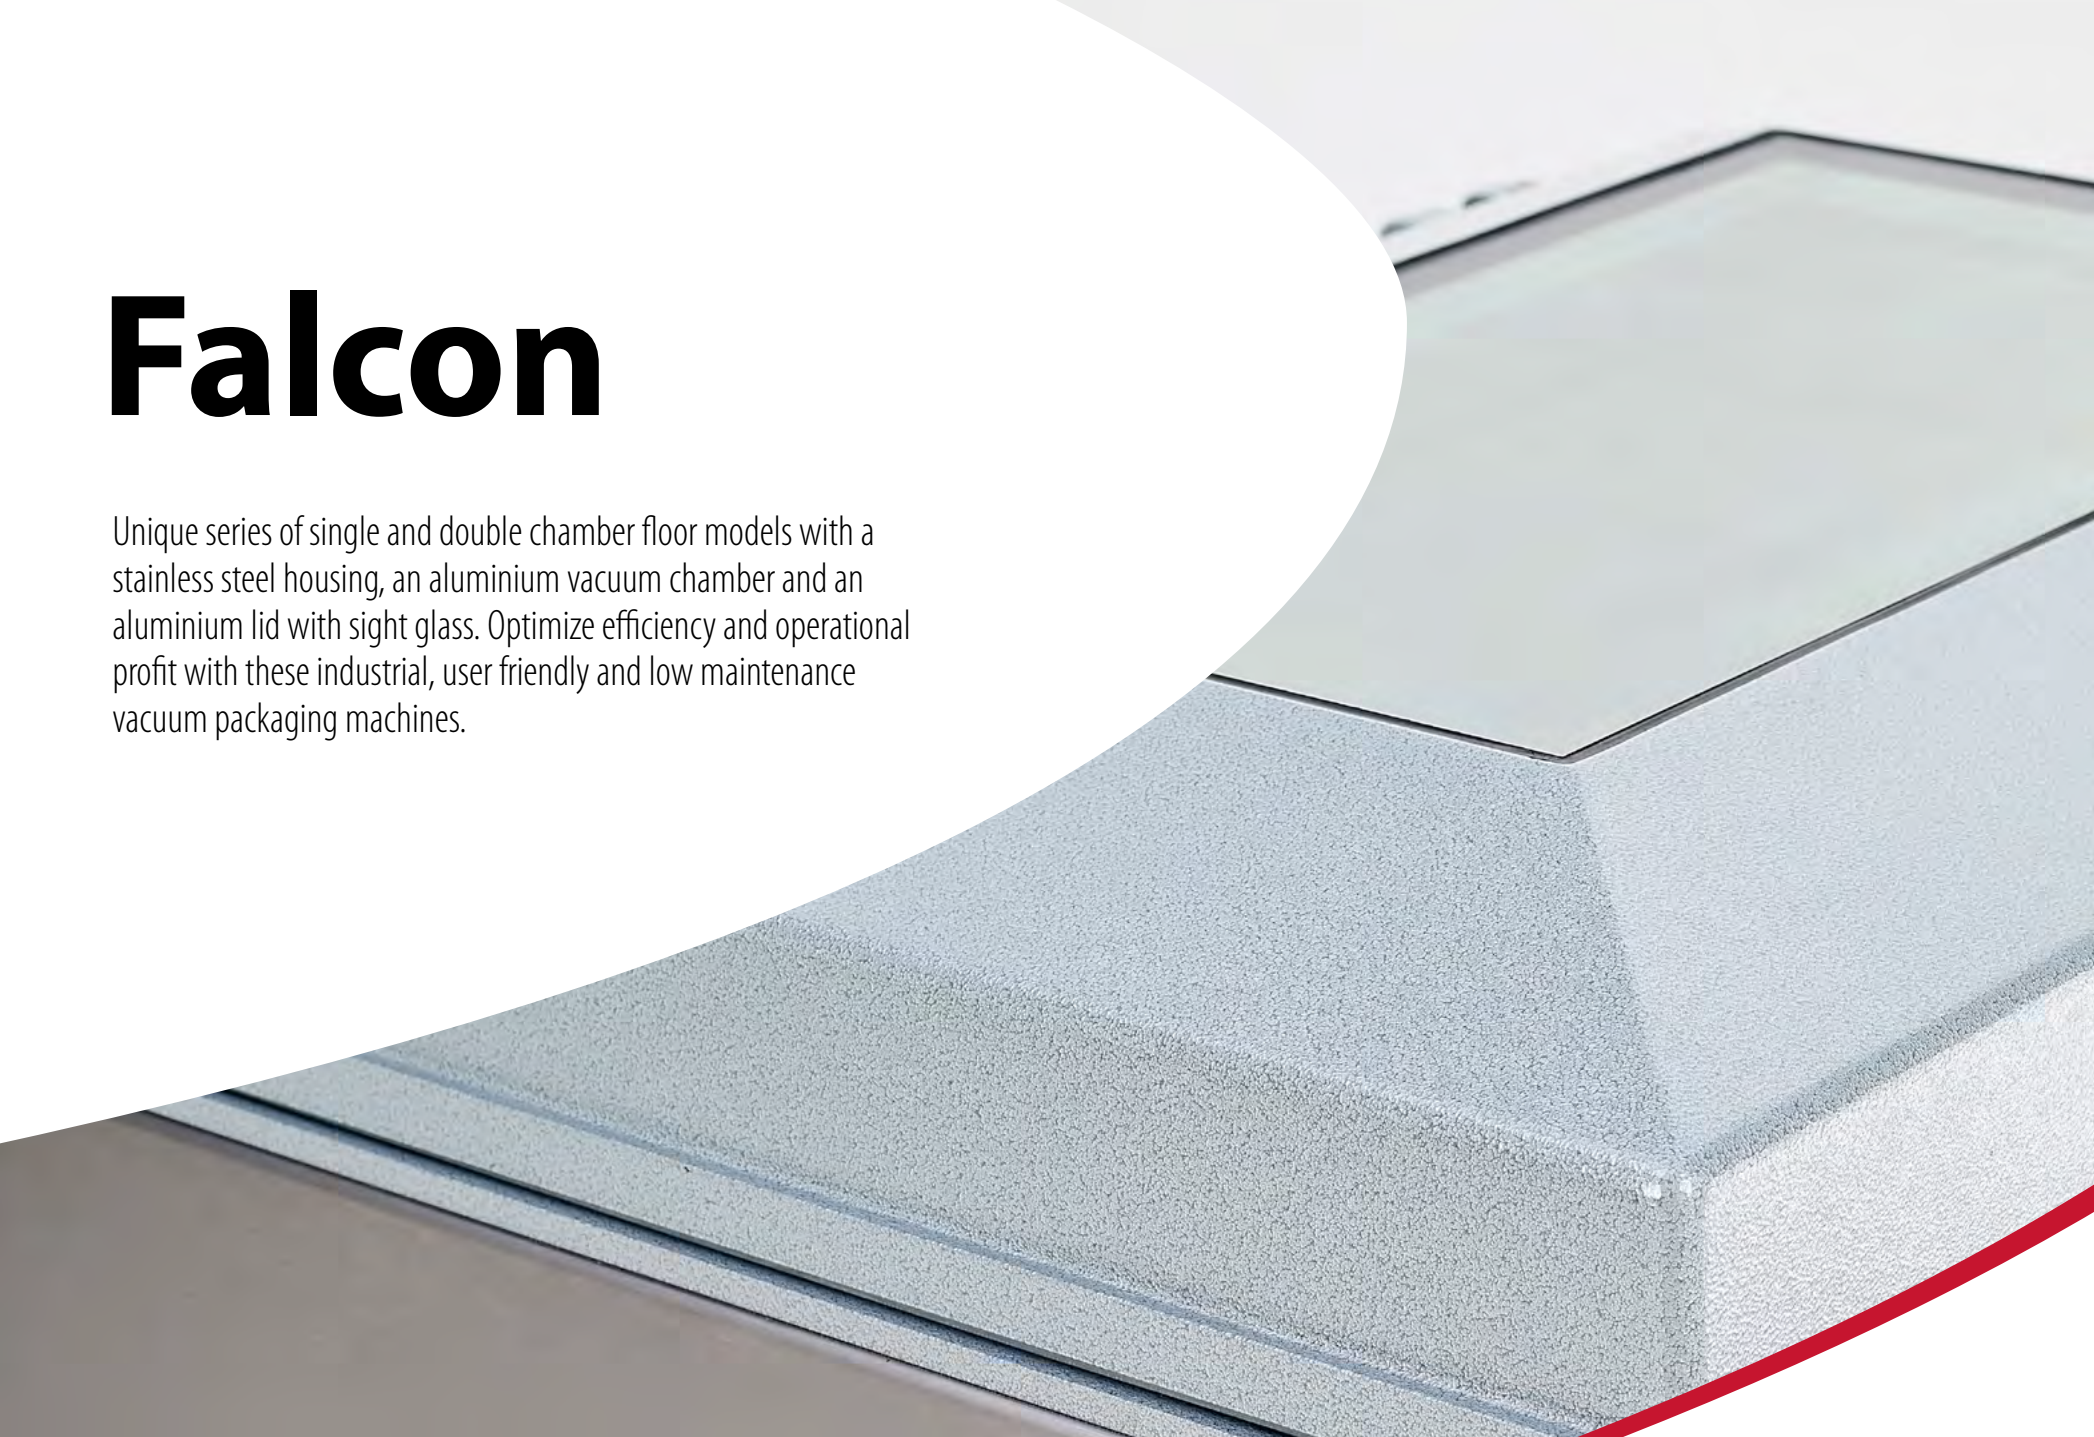

“Efficient vacuum packaging machines suitable for multiple applications, both food and non-food.”

FALCON 52

Standard



PUMP CAPACITY 63 m³/h
MACHINE CYCLE 15-40 sec
CHAMBER DIMENSIONS
520 x 500 x 235 mm
MACHINE DIMENSIONS
695 x 682 x 1060 mm
SEAL BARS 2 x 520 mm
WEIGHT 163 kg
VOLTAGE 400V-3-50Hz
POWER 2,4-3,5 kW

STANDARD

TIME CONTROL, DOUBLE SEAL/
CUT-OFF SEAL/WIDE SEAL (10 MM)

OPTIONS

SENSOR CONTROL, LIQUID
CONTROL, ACS, GAS FLUSH
(INCL. PRESSED AIR CONNECTION),
SOFT AIR, 1-2 CUT-OFF SEAL,
BI-ACTIVE SEAL, ESD
CONFIGURATION (IN COMBINATION
WITH BI-ACTIVE SEAL)

FALCON 80

Standard



Standard



Standard



Option



PUMP CAPACITY 100 m³/h
MACHINE CYCLE 15-40 sec
CHAMBER DIMENSIONS
510 x 760 x 235 mm
MACHINE DIMENSIONS
820 x 900 x 1050 mm
SEAL BARS 760 mm (front),
510 mm (right)
WEIGHT 227 kg
VOLTAGE 400V-3-50Hz
POWER 3,0-5,0 kW

STANDARD

TIME CONTROL, DOUBLE SEAL/
CUT-OFF SEAL/WIDE SEAL (10 MM)

OPTIONS

SOFT AIR, SENSOR CONTROL,
LIQUID CONTROL, ACS, GAS FLUSH
(INCL. PRESSED AIR CONNECTION),
1-2 CUT-OFF SEAL, BI-ACTIVE
SEAL, ESD CONFIGURATION (IN
COMBINATION WITH BI-ACTIVE
SEAL), 3RD SEAL BAR

The machine dimensions listed refer to length x width x height. Other voltages available. Textual and printing errors reserved.

Falcon



FALCON 2-60

Standard



Option



PUMP CAPACITY 63 m³/h

MACHINE CYCLE 15-40 sec

CHAMBER DIMENSIONS

580 x 450 x 235 mm

MACHINE DIMENSIONS

900 x 1060 x 1179 mm

SEAL BARS 2 x 450 mm

WEIGHT 236 kg

VOLTAGE 400V-3-50Hz

POWER 2,4-3,5 kW

STANDARD

TIME CONTROL, DOUBLE SEAL/
CUT-OFF SEAL/WIDE SEAL (10 MM)

OPTIONS

SOFT AIR, SENSOR CONTROL,
LIQUID CONTROL, ACS, GAS FLUSH
(INCL. PRESSED AIR CONNECTION),
1-2 CUT-OFF SEAL, BI-ACTIVE
SEAL, ESD CONFIGURATION (IN
COMBINATION WITH BI-ACTIVE SEAL)



Unique feature
is the high lid
with a glass
window for
operational
monitoring.

FALCON 2-70

Standard



PUMP CAPACITY 100 m³/h

MACHINE CYCLE 15-40 sec

CHAMBER DIMENSIONS 700 x

550 x 235 mm

MACHINE DIMENSIONS 1020 x

1260 x 1130 mm

SEAL BARS 2 x 550 mm

WEIGHT 319 kg

VOLTAGE 400V-3-50Hz

POWER 3,0-5,0 kW

STANDARD

TIME CONTROL, DOUBLE SEAL/
CUT-OFF SEAL/WIDE SEAL (10 MM)

OPTIONS

SOFT AIR, SENSOR CONTROL, LIQUID
CONTROL, ACS, GAS FLUSH
(INCL. PRESSED AIR CONNECTION),
1-2 CUT-OFF SEAL, BI-ACTIVE
SEAL, ESD CONFIGURATION (IN
COMBINATION WITH BI-ACTIVE SEAL)

The chamber dimensions listed refer to the usable space in the vacuum chamber (length x width x height). Other voltages available. Technical and printing errors reserved.

